


DRAWING NUMBER: MD-216-4000-EG-CV-DED-1084 | REV: D01

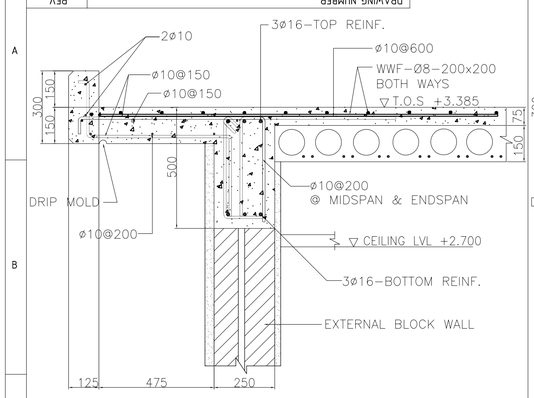

TYPICAL SECTION FOR DROP BEAM(B1) — SCALE 1:10 — Z / DED 1082

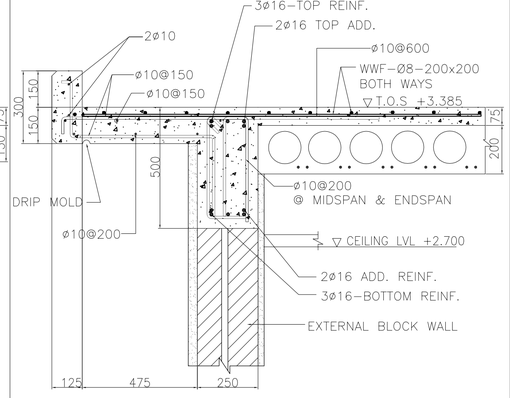


TYPICAL SECTION FOR DROP BEAM(B2) — SCALE 1:10 — Z1 / DED 1082

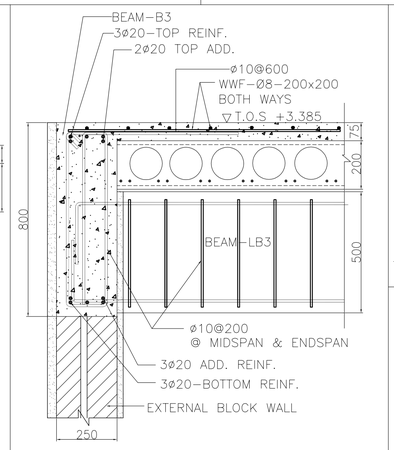


TYPICAL SECTION FOR DROP BEAM(B3) — SCALE 1:10 — G / DED 1082


NOTE: CONTROL JOINTS SHALL BE PROVIDED AT MAX SPACING OF 20 FT (6.10 M) AS PER ACI CODE

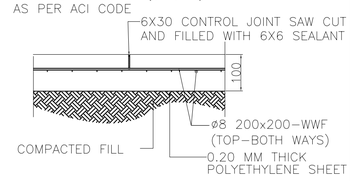


TYP CONTROL JOINT(CJ)DETAIL — SCALE 1:10 — B / DED 1082

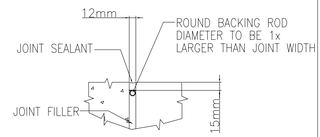


TYP JOINT SEAL DETAIL — SCALE 1:10 — C / DED 1082

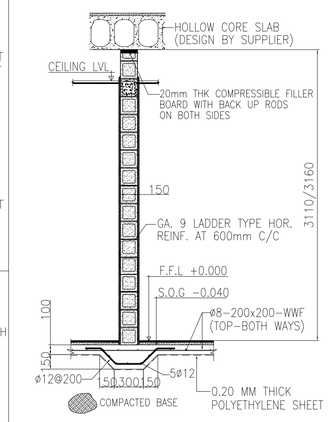


TYP. INTERNAL WALL SECTION — SCALE 1:10 — D / DED 1083

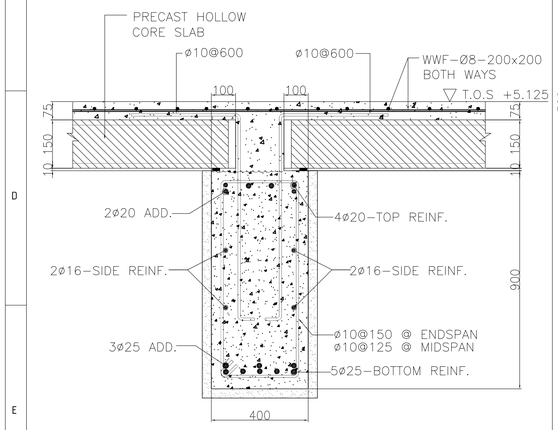


TYPICAL SECTION FOR LEDGER BEAM(LB6) — SCALE 1:10 — Q / DED 1084

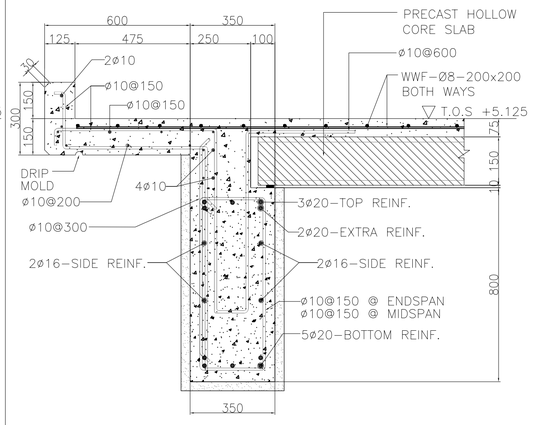

TYPICAL SECTION FOR LEDGER BEAM(LB5) — SCALE 1:10 — T / DED 1084

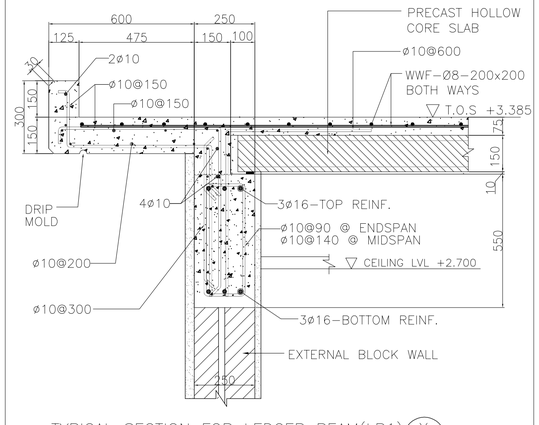


TYPICAL SECTION FOR LEDGER BEAM(LB1) — SCALE 1:10 — X / DED 1082

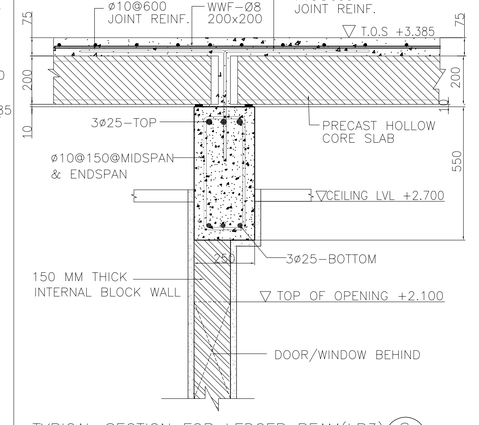


TYPICAL SECTION FOR LEDGER BEAM(LB3) — SCALE 1:10 — S / DED 1082

SCHEDULE OF ROOF BEAMS

BEAM MARK	DIMENSIONS		STEEL REINFORCEMENT				STIRRUPS	REMARKS
			BOTTOM		TOP			
	WIDTH	DEPTH	STRAIGHT	ADD.	STRAIGHT	ADD.		
LB1	250	500	3ø16	–	3ø16	–	PROVIDE ø10@90@ ENDSPAN & ø10@140 THE MID SPAN	REFER DETAIL–X @DED–1082
LB2	250	550	3ø20	–	3ø20	–	PROVIDE ø10@150 BOTH @ MIDSPAN & THE END SPAN	REFER DETAIL–S @DED–1082
LB3	250	550	3ø25	–	3ø25	–	PROVIDE ø10@150 BOTH @ MIDSPAN & THE END SPAN	REFER DETAIL–W @DED–1082
LB4	250	550	3ø25	–	3ø25	2ø25	PROVIDE ø10@150 BOTH @ MIDSPAN & THE END SPAN	REFER DETAIL–W @DED–1082
LB5	350	800	5ø20	–	3ø20	2ø20	PROVIDE ø10@150 BOTH @ MIDSPAN & THE END SPAN	REFER DETAIL–W @DED–1082
LB6	400	900	5ø25	3ø25	4ø20	2ø20	PROVIDE ø10@150@ ENDSPAN & ø10@125 THE MID SPAN	REFER DETAIL–W @DED–1082
B1	250	500	3ø16	–	3ø16	–	PROVIDE ø10@200 BOTH @ MIDSPAN & THE END SPAN	REFER DETAIL–Y @DED–1082
B2	250	500	3ø16	2ø16	3ø16	2ø16	PROVIDE ø10@200 BOTH @ MIDSPAN & THE END SPAN	REFER DETAIL–Y @DED–1082
B3	250	800	3ø20	3ø20	3ø20	2ø20	PROVIDE ø10@200 BOTH @ MIDSPAN & THE END SPAN	REFER DETAIL–G @DED–1082

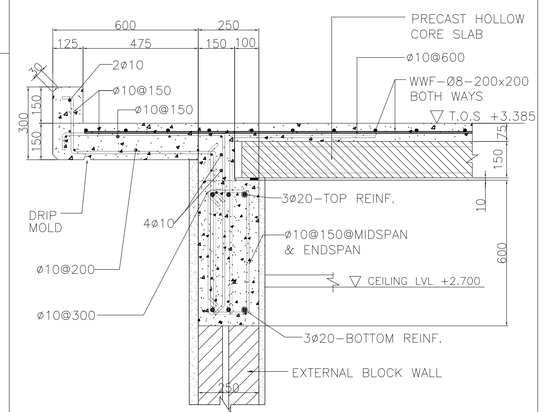

TYPICAL SECTION FOR LEDGER BEAM(LB2) — SCALE 1:10 — X1 / DED 1082

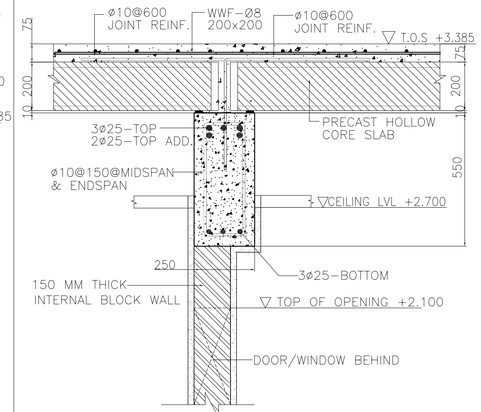

TYPICAL SECTION FOR LEDGER BEAM(LB4) — SCALE 1:10 — S1 / DED 1082

LEGENDS

F/FDN.–FOUNDATION
ADD–ADDITIONAL
C/COL.–COLUMN
FFL–FINISH FLOOR LEVEL
FGL–FINISH GROUND LEVEL
TOS–TOP OF SCREED
WWF–WELDED WIRE FABRIC
HCS–HOLLOW CORE SLAB
GB–GRADE BEAM
IJ–ISOLATION JOINT
CJ–CONTROL JOINT
BW's–BOTH WAYS
S.O.G–SLAB ON GRADE
TYP–TYPICAL
HOR.–HORIZONTAL
REINF.–REINFORCEMENT
LVL–LEVEL
RL–REDUCED LEVEL
P–PEDESTAL
MAX–MAXIMUM
ADD–ADDITIONAL
ø–DIAMETER
DOC. –DOCUMENT

NOTES

1. ALL DIMENSIONS ARE GIVEN IN MILLIMETRES AND ELEVATIONS ARE IN METRES UNLESS OTHERWISE NOTED.
2. MINIMUM REINFORCED CONCRETE GRADE TO BE USED FOR SUPERSTRUCTURE & SUBSTRUCTURES IS C35(5000 PSI).
3. MINIMUM LEAN CONCRETE GRADE TO BE USED FOR THE SUB–STRUCTURES IS C15(2175 PSI).
4. ALL REINFORCING STEEL SHALL BE DEFORMED BILLET STEEL BARS CONFORMING TO ASTM–A615, WITH MINIMUM YIELD STRENGTH OF FY420 MPA .
5. THE NET SOIL BEARING CAPACITY CONSIDERED IN FOUNDATION DESIGN IS 570 KPA(REFER DOC 216–3000–EG–CV–RPT–1008)
6. WATER PROOFING INSULATION SHALL BE AS PER PROJECT SPECIFICATIONS & ITS MATERIAL TO BE APPROVED BY SITE ENGINEER.
7. MINIMUM CONCRETE COVER AS PER SBC–304–2018(TABLE 20.6.1.3.1) MEASURED FROM REBAR SHALL BE
   a. CONCRETE CAST AGAINST & PERMANENTLY EXPOSED TO EARTH (INCLUDING FOUNDATIONS OVER SUB–SLAB) FORMED CONCRETE EXPOSED TO EARTH OR WEATHER.....50MM
   b. CONCRETE NOT EXPOSED TO WEATHER NOR IN CONTACT WITH GROUND BEAMS, COLUMNS.....40MM SLABS, WALLS, JOISTS.....20MM
   c. CONCRETE SLAB OVER 50MM SUB–SLAB.....20MM
8. ALL DRAWINGS MUST BE READ IN CONJUNCTION WITH RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS RELATED TO THE SAME SHEET AND ANY ITEM ON IT.
9. F.F.L +0.00 MENTIONED IS EQUIVALENT TO RL 915.200

DOCUMENT NUMBER	REFERENCE DOCUMENTS	REV	DATE	REVISION DESCRIPTION	DRN	CHK	ENG	APP	EMP
MD-216-4000-EG-CV-DED-1083	DETAIL OF FDN. COL. & GRADE BEAM								
MD-216-4000-EG-CV-DED-1082	LAYOUT OF ROOF & GRADE SLAB								
MD-216-4000-EG-CV-GAD-1081	LAYOUT OF FDN. COL. & GRADE BEAM								
MD-216-6000-EG-CV-STD-1001	REINFORCEMENT STANDARD	D01	24/05/2023	AS-BUILT	--	AVG	--	SJM	
MD-216-4000-EG-AR-GAD-3045	BUILDING ELEVATIONS & SECTIONS	C02	09/11/2020	ISSUED FOR CONSTRUCTION & REVISED AS MARKED (C02)	--	AVG	--	SJM	
MD-216-4000-EG-AR-GAD-3043	BUILDING PLANS	C01	26/07/2020	ISSUED FOR CONSTRUCTION	--	AVG	--	SJM	
MD-216-6000-EG-CV-STD-1002	HOLLOW CORE SLAB STANDARD	A01	24/06/2020	ISSUED FOR APPROVAL	--	AVG	--	SJM	

DESIGNER: مكتب الخليج للاستشارات الهندسية المحدودة، المملكة العربية السعودي — GULF CONSULT ARCHITECTS AND ENGINEERS

DRAWING NUMBER	REVISION
EMERGENCY-SERVICE-BUILDING-ST-004	A01

DATE	20/06/2020	DATE	21/06/2020	DATE	22/06/2020
DRAWN	MAH	CHECKED	MF	APPROVED	FK

LARSEN & TOUBRO DRAWING NUMBER: 019045_900_C_D_24042_003 — REVISION: 3

OUTOTEC DRAWING NUMBER: 900707 _ GAU01 _ AN03 _ CTB17 _ 40003 — DOCUMENT ID: OU100670824 — REVISION: 3

LARSEN & TOUBRO

This drawing is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Outotec

The content of these documents are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without prior written permission of Outotec is prohibited.

MA'ADEN معادن — Saudi Arabian Mining Company شركة التعدين العربية السعودية

This document and the information contained herein is Ma'aden proprietary know-how. This document or any part thereof should not be reproduced, stored in a retrieval system or transmitted by any means, electronic or otherwise, or divulged without prior written permission of Ma'aden.

DRAWN	-	-
CHECKED	AVG	23/06/2020
ENGINEER	-	-
APPROVED	SJM	24/06/2020
EMPLOYER		
SCALE	1:125	A1

MANSOURAH - MASSARAH GOLD PROJECT
DETAIL DRAWING
PROCESS PLANT: EMERGENCY SERVICES BUILDING
DETAIL OF ROOF & GRADE SLAB

DRAWING NUMBER: MD-216-4000-EG-CV-DED-1084 — REV: D01